




1




*Your circuit breaker may look different.




Shock Hazard. Electric shock could result in serious injury or death. Make sure circuit breaker is set to OFF before installation. Must be installed by a qualified electrician.


2



Front plate x1



Lamp body x1



Cover plate x1



Back plate x1
w/LED driver



Cover screw x1




Back screws x2



Wire nuts x2

3

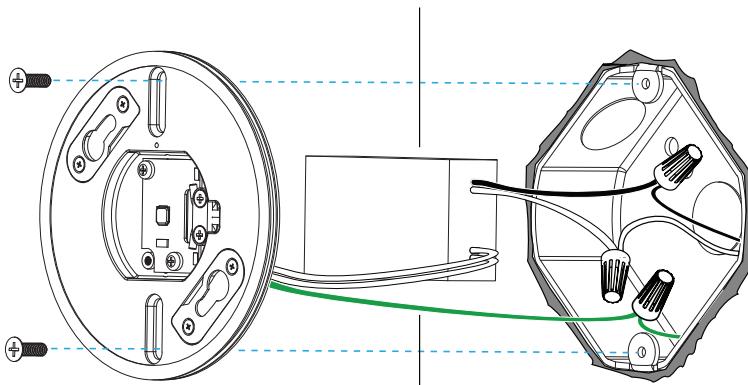

Using the provided wire nuts, connect the Live (black) wire to the Live wire from the mains, the Neutral (white) wire to the Neutral wire from the mains, and the Ground (green) wire to the Ground wire from the mains.


Enclose the LED driver inside the wiring (junction) box. The wiring box must be large enough to accommodate the LED driver (2 3/4" x 1 5/8" x 7/8").

A 4" octagon box with a depth of 1 1/2" or greater is recommended for this installation.




(Optional) Connecting to wall dimmer

0-10V Wiring

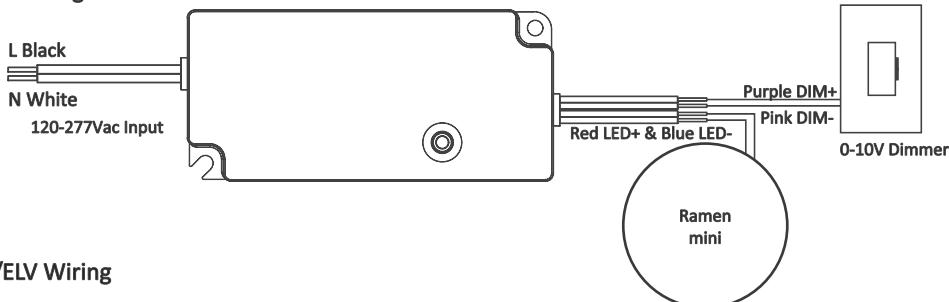

Triac/ELV Wiring

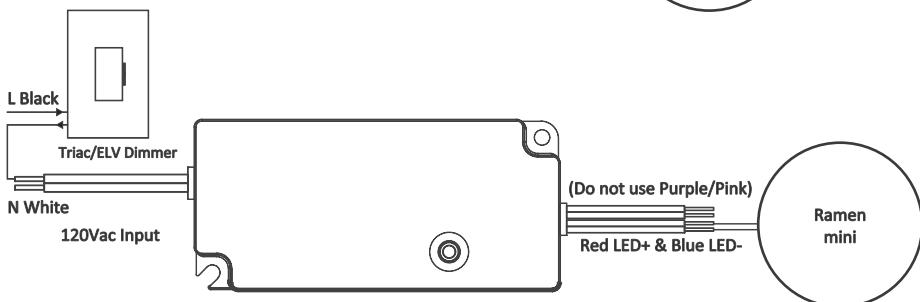

Visit koncept.com/dimmers for information on compatible dimmers.

Mode switching

1. Dimming Mode Switching Window: Operation is only allowed within 30 seconds after power-on, and the device must remain powered off for at least 5 seconds before re-powering.
2. Activation Condition: The target action must be continuously maintained for 5 seconds to take effect.
3. Device Limitation: Only one dimming mode can be used at a time (e.g., if 0-10V mode is selected, a TRIAC dimming knob cannot be connected simultaneously. If TRIAC mode is selected, the 0-10V signal must remain disconnected and insulated).
4. Mode Persistence: Once a dimming mode is activated, it remains in effect until the next mode switch.


Dimming Mode Operation Steps Reference Table

Target mode	Action requirements	Effective verification
0-10V mode	Control voltage \leq 5V (hold for 5 seconds)	0-10V Mode: Normal Dimming
TRIAC/ELV Mode	Adjust the knob to 80%~50% brightness (hold for 5 seconds)	Triac/ELV Mode: Normal Dimming




4

Using the provided Cover screw, secure the cover plate onto the back plate.

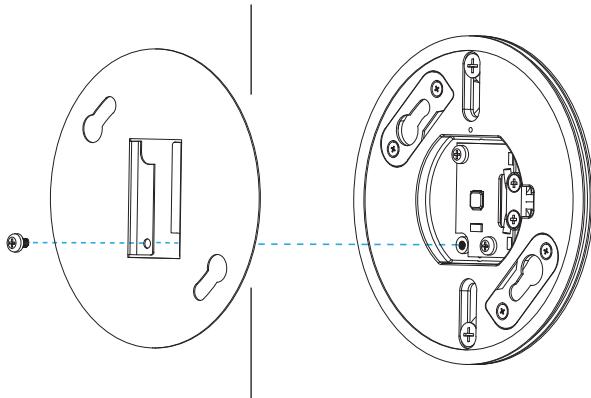


5

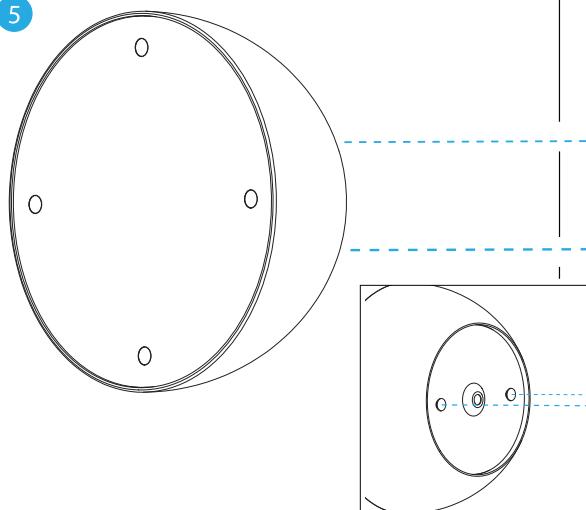


Align the two rounded mounts on the lamp body with the mounting holes on the back plate. Then, turn the lamp body clockwise until it is firmly secured.



6 Finally, magnetically put on cover plate.

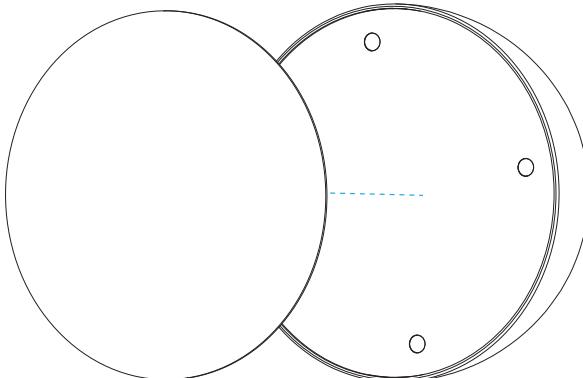

7 Installation complete.

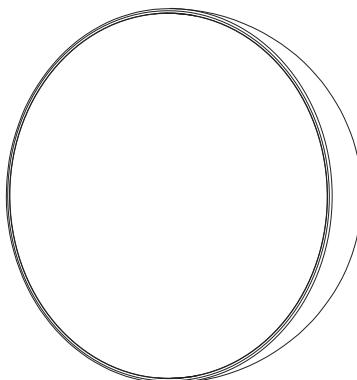

Model	RMW-06
Light Color	Soft warm
Light Temperature	3000 K
Dimmer compatibility	See: koncept.com/dimmers

Register your Koncept LED lamp online and receive:

- One Year Warranty Extension
- Priority Product Servicing

Visit www.koncept.com/productsupport and enter your serial number (S/N: XXXXXXXX) located on your product.

Warnings



Warning: To reduce the risk of fire, electric shock or injury:

- Do not handle plug or appliance with wet hands
- Do not stare directly at LEDs



Overheating may result in reduced LED lifespan:

- Remove plastic bag from lamp before use.

Koncept Inc.
429 E. Huntington Drive
Monrovia, CA 91016, USA
Phone: 323-261-8998
Fax: 323-261-8998
support@koncept.com
www.koncept.com