

KONCEPT

Remote transformer installation

This installation manual is for Z-Bar pendant light CROWN 36 inch and 48 inch models only. For 16 inch and 24 inch models please refer to the 16 inch and 24 inch models manual.




Shock Hazard. Electric shock could resultin serious injury or death. Make sure circuit breaker is setto OFF before installation. Must be installed by a qualified electrician.



the ceiling according to the measurements shown below. The Z-BAR pendant light will be hung vertically from each of the joints.


Before installing the pendant light, map out the installation points on

Please note the positions of the different joint types and make sure they are placed throughout the ring as shown in the illustration below.

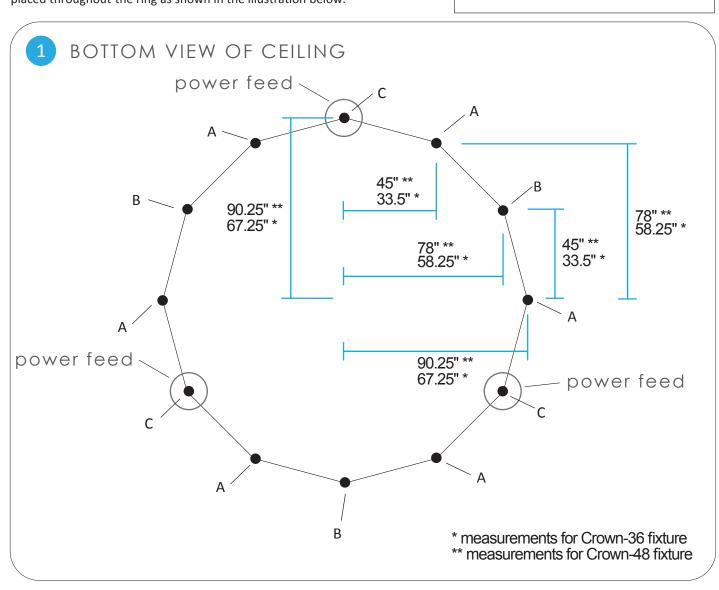







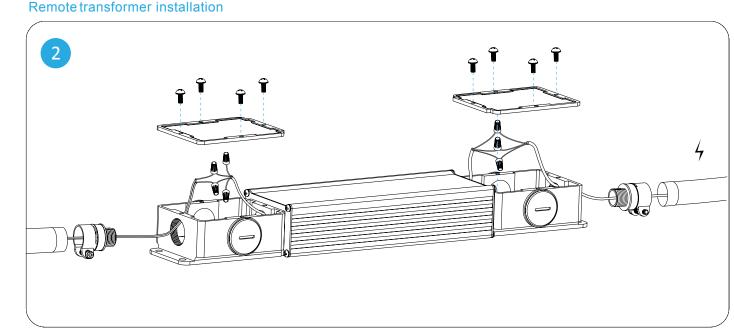

Using the provided DC cable & connectors, connectthe wires inside the transformer enclosure as illustrated in the Wiring Diagram

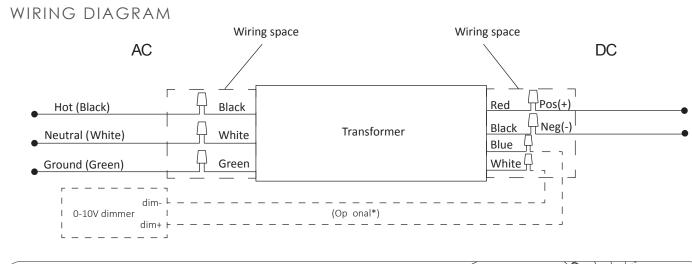

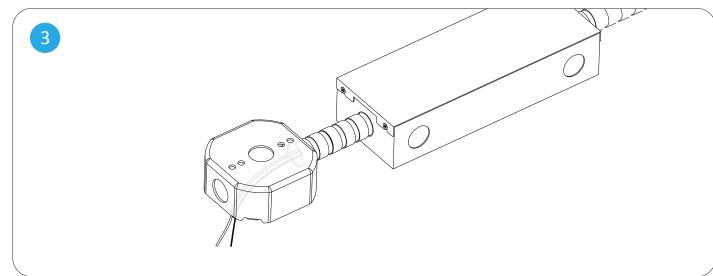


Feed the Red and Black DC wires through the conduit into the junction box (conduit and junction box not provided). Affix the transformer enclosure and junction box properly inside the ceiling, with an opening allowing access to the junction box.






KONCEPT

Remote transformer installation

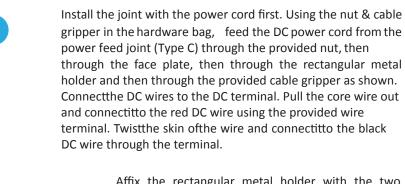

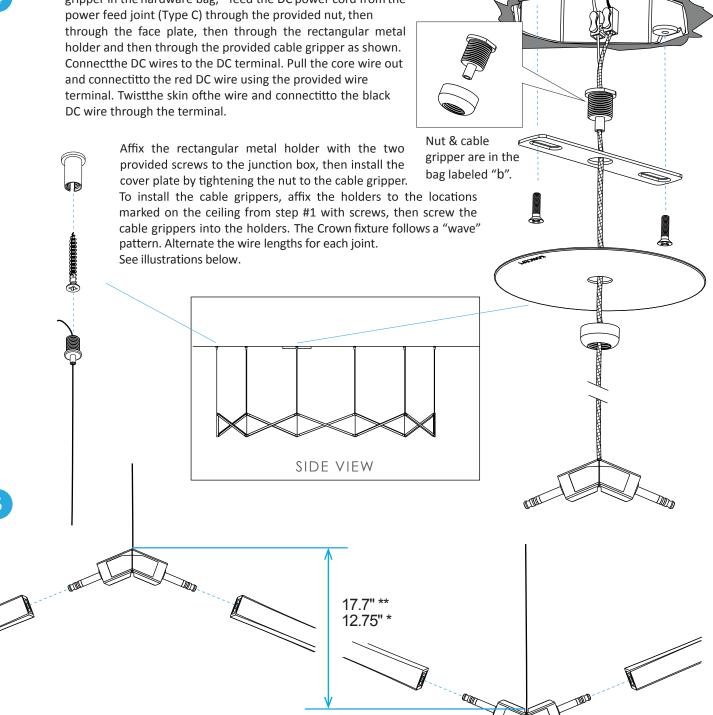

Attach the LED light bars to the joints making sure they are fully inserted with no gaps between the light bars and the joints. Ensure every joint is positioned so that its center opening is always facing inward, and not upward, downward or outward of the entire fixture.

> * measurements for Crown-36 fixture ** measurements for Crown-48 fixture





KONCEPT

Five Year Limited Product Warranty

Koncept warrants to the original purchaser of this product against manufacturer defects in design, assembly, material, or workmanship, and will, at Koncept's option, replace or repair any defective product free of charge. This coverage is valid for five years from the date of purchase as long as the original purchaser owns the product. Koncept will replace or repair the product, which Koncept, at its sole discretion, agrees is defective, free of charge provided that the following conditions for a return are fulfilled. This warranty does not apply to any product damaged by accident, physical or electrical misuse or abuse, improper installation, alteration, any use contrary to its intended function, war, fire, flood, or any other acts of nature, or unauthorized repair.

Koncept assumes no liability for any events such as fines arising out of the use of this product or any consequential damages caused by any failure of the product to function properly. Under no circumstances should this warranty or the product covered by it be construed as an insurance policy against loss of any kind. Koncept staff neither assumes nor authorizes any person or organization to make any warrantiesor assume any liability in connection with the saleor use of this product. This warranty coversonly product sused in the 50 USstates and/or Canada. This is the complete ZBPwarranty and no other warranty exists. Some jurisdictions may not allow limitations on how long an implied warranty lasts, or the exclusionor limitation of incidental or consequential damages, so the above exclusions or limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary in different states and countries.

- To file a replacement/repair claim under the warranty:
- 1) Contact Koncept for a return authorization number during the warranty period. A claim will not be accepted without a return authorization number.
- 2) Make a copy of the original purchase receipt with purchase date and product name clearly shown. 3) Provide original purchaser'sfull name, email address (optional), daytime phone, and postal address.
- 4) Return the defective product to Koncept freight prepaid and accompanied by (1),(2), and (3) to the following address:

Limited Product Warranty Koncept Inc. 429 E.Huntington Drive, Monrovia, CA91016

Warnings



Do not use in wet locations

• Do not handle plug or appliance with wet hands • Do not stare directly at LEDs

Overheating may result in reduced LED lifespan: Keep out of direct sunlight.

• Remove plastic bag from lamp before use. • Recommended ambienttemperature: under 77 °F.

Koncept Inc. 429 E. Huntington Drive Monrovia, CA91016, USA Phone: 323-261-8999 Fax:323-261-8998

Customer Support: support@koncept.com

Web Address: www.koncept.com

Specifications

•	
Model	ZBP-C
Light Color	Soft Warm
Color Temperature	3000 K
Brightness Adjustability	Compa ble with 1-10V dimmers