


KONCEPT



# Z-Bar pendant crown

The Z-Bar pendant crown is a dramatic piece comprised of 12 LED light bars. Available in 3 standard finishes and 2 standard sizes, it's suitable for commercial and residential spaces alike.


# Standard Configurations

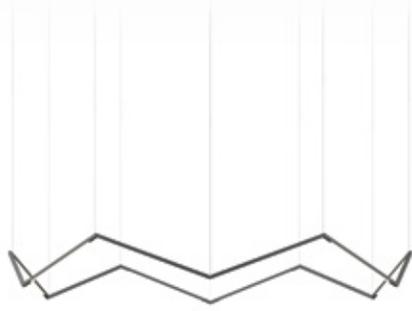


crown with 16" light bars



crown with 24" light bars

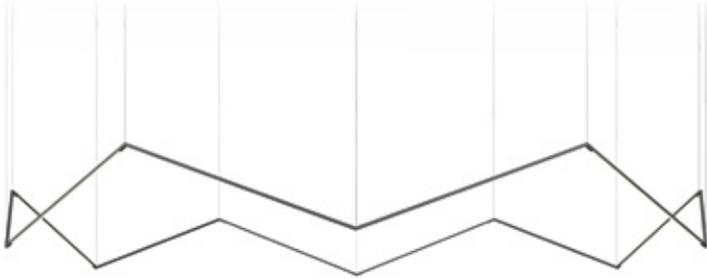

crown with 36" light bars

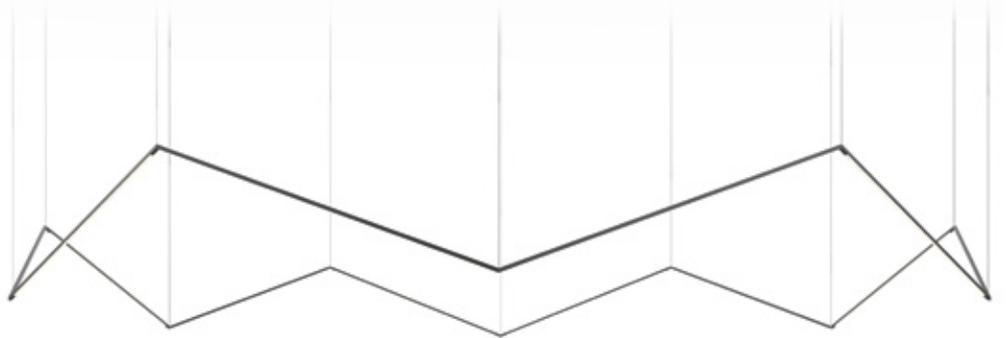

crown with 48" light bars

# Standard Configurations

|                               |  |
|-------------------------------|--|
| Lumens:                       | 16-C: 4800 / 24-C: 7200 / 36-C: 10800 / 48-C: 14400                                      |
| Energy Consumption:           | 16-C: 84 W / 24-C: 120 W / 36-C: 180 W / 48-C: 240 W                                     |
| Rated Lifespan                | >60,000 hours=   |
| Color Rendering Index (CRI) : | 90   |
| Brightness Adjustability:     | Compatible with ELV wall dimmers*, 1-10V control   |
| Material:                     | Aluminum, plastic  |
| Cable length:                 | 10'  |
| Safety Rating:                | C-UL-US Certified, CE  |
| Warranty:                     | 5 years; 1 year for hardwire driver  |
| Voltage:                      | 277V (remote transformer)  |
| Standard Finishes:            | Matte black, matte white, silver   |
| IES:                          | Visit <a href="http://koncept.com/zbarpendant">koncept.com/zbarpendant</a> for IES files |


\*Visit [koncept.com/dimmers](http://koncept.com/dimmers) for information on compatible dimmers.  
Remote transformers are only compatible with 1-10V dimmers.


## Power placement

The Z-Bar pendant crown can only be mounted by multipoint installation.


### Dimensions

16-C: **62.8"**  
24-C: **91.41"**  
36-C: **137.12"**  
48-C: **182.82"**





Remote Transformer

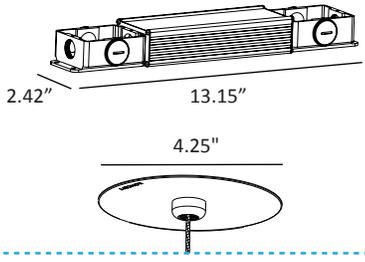

16-C: **63.8"**  
24-C: **92.76"**  
36-C: **139.14"**  
48-C: **185.52"**

## How to specify

1. Choose an option from each column and enter into the appropriate fields at the bottom.
2. Submit this "SKU" to [sales@koncept.com](mailto:sales@koncept.com), along with any questions.

|            | Light Bar Length (in)<br><small>(this is length of each light bar, NOT length of fixture.)</small> | Model    | Light Temperature (K)                | Finish  | Mount                    |
|------------|--|----------|--------------------------------------|---|--------------------------|
| <b>ZBP</b> |  | <b>C</b> | <b>2,700*</b><br>3,000 (SW)          | Silver (SIL)<br>Matte Black (MTB)<br>Matte White (MWT)<br>Gold (GLD)* | Remote Transformer (RTM) |
|            | 16<br>24<br>36*<br>48*   |          | 3,500*<br>4,000*<br>4,500*<br>5,000* |   |                          |

Order example: ZBP - 24 - C - SW - SIL - RTM

\*Custom

Remote Transformer is recommended for any configuration requiring more than 40 W energy consumption  
Additional lead time/charges may be applied to non-stocked options

## LEED information

### Integrative Process

To support high-performance, cost-effective project outcomes through an early analysis of the interrelationships among systems. Koncept's LED lighting fixtures operate at high efficacy, therefore helping to minimize energy costs. All Koncept lighting fixtures are dimmable so that occupants can choose the appropriate setting to avoid energy overuse.

### Interior Lighting

To promote occupants' productivity, comfort and well-being by providing high-quality lighting. Koncept's entire line of hardwired lighting fixtures are dimmable. Users can adjust the brightness settings to suit their needs. Furthermore, all products utilize high quality LED light sources with CRI over 80 and L90 rated lifespan over 60,000 hours.



On GSA schedule