

KONCEPT



## Z-BAR slim


*Designer*  
Peter Ng

When the original Z-Bar is too big and the Z-Bar Mini is too small, Z-Bar Slim will be just right for your space. Z-Bar Slim features all of the great functionality of the classic Z-Bar: three-arm design, maximum flexibility, dimming capabilities, and most importantly, beautiful diffused light.


Lumens: 400  
 Energy Consumption: 8.5 W  
 Rated Lifespan: 50,000 hours  
 Color Temperature: Cool: 4,500 K / Warm: 3,500 K  
 CRI: 85  
 Dimmer: Built-in touchstrip  
 Brightness Adjustability: Multiple dimming levels  
 Standard Finishes: Metallic Black, Silver  
 Material: Aluminum, plastic  
 Cord: Black, 10'  
 C-UL-US Certified

AR3200-

- CD= Cool White Light
- WD= Warm White Light
- MBK = Metallic Black
- SIL = Silver
- DSK = Desk Base
- CLP = Clamp (One-Piece)
- 2CL = Two-Piece Clamp
- SLT = Slatwall Mount
- WAL = Wall Mount
- GRM = Grommet Mount
- THR = Through-Table Mount
- QCB = Wireless Charging Base
- PWD = Power Base
- HWS = Hardwired Wall Mount

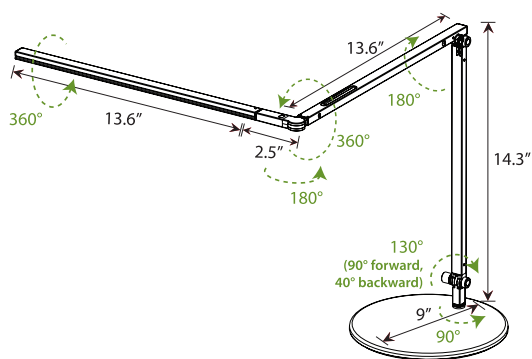

#### Mounting Options\*

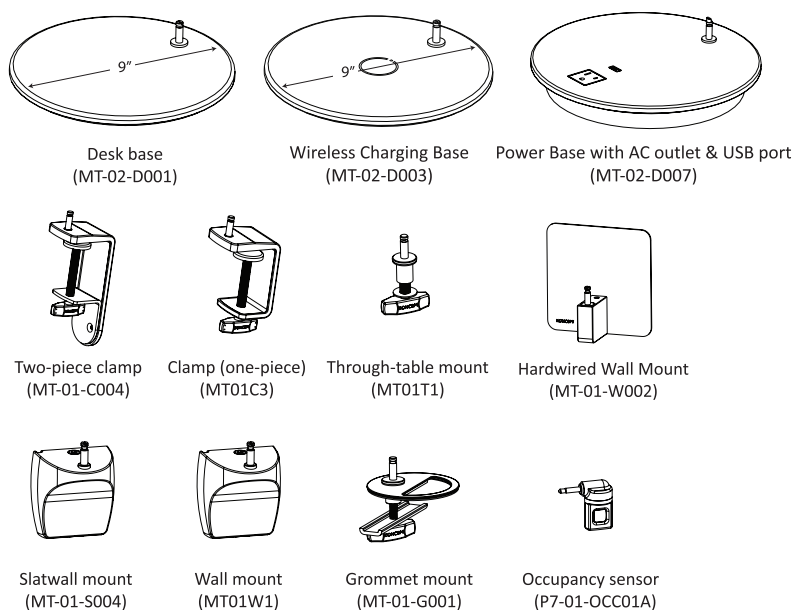

\*Limited finishes available on mounting options

#### Potential LEED Points


##### Integrative Process (Possible 2 points)

To support high-performance, cost-effective project outcomes through an early analysis of the interrelationships among systems. Koncept's LED desktop and task lighting provides finer control over lighting levels in occupied spaces. With personal lighting in place, elimination or downsizing of building lighting systems is possible.

##### Interior Lighting (Possible 2 points)

To promote occupants' productivity, comfort and well-being by providing high-quality lighting. All Koncept's task lighting products provide more than three lighting levels that are easily adjustable by occupants to suit their needs. Furthermore, all Koncept's task lighting products use high quality LED light sources with CRI over 80 and L70 rated lifespan over 50,000 hours. Desktop and task personal lighting also provides the opportunity to reduce overhead lighting.

Light source placed at 15" away from worksurface

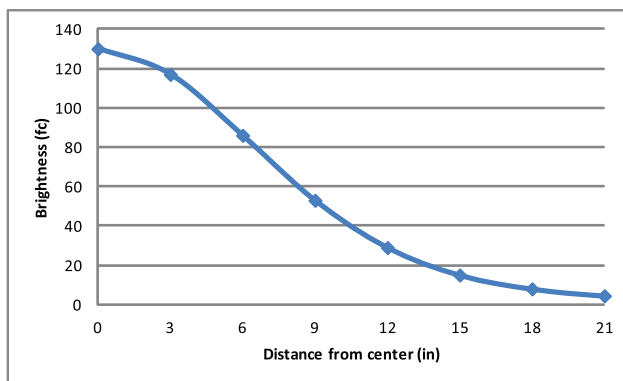

(Shown: photometrics of diffused light model)