



Linear

Efficiency in Light

# UCX Pro

Designers Kenneth Ng, Edmund Ng

Best of NeoCon GOLD 2015 Buildings Product Innovations 2015

UCX Pro maintains the emphasis on ultra-high energy efficiency and sleek, minimalist design that characterize Koncept products. Remotely control the color and brightness settings with the optional wifi module and smartphone app. Schedule your light to automatically change in intensity and light color throughout the day, synchronizing with your circadian rhythm. Connect multiple units to brighten larger spaces. Includes magnetic and screw mounts.

	UCX-19	UCX-27	UCX-37
Lumens:	760	1140	1672
Footcandles:	130	171	246
Lux:	1399	1841	2648
Energy Consumption :	9 W	13 W	19 W


Rated Lifespan 60,000+ hours

Variable from 2,700K to 5,000 K Color Temperature:


Color Rendering Index (Ra): Color Rendering Index (R9): 50+ Brightness Adjustability: **Touch Slider** 

Material: Aluminum, plastic Safety Rating: C-UL-US Certified

Warranty: 5 years Voltage: 100-240V Standard Finish: Silver



For more details, please contact sales@koncept.com.

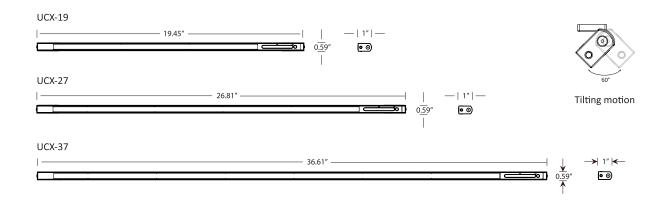

Wifi module

## **Optional Accessories** Male to male connector Occupancy sensor 30" / 12" daisy chain cord

### **LEED Information**

#### **Integrative Process**


To support high-performance, cost-effective project outcomes through an early analysis of the interrelationships among systems. Koncept's LED desktop and task lighting provides finer control over lighting levels in occupied spaces. With personal lighting in place, elimination or downsizing of building lighting systems is possible.

#### **Interior Lighting**

To promote occupants' productivity, comfort and well-being by providing high-quality lighting.

Koncept's portable task lighting products provide more than three lighting levels that occupants can easily adjust to suit their needs. Furthermore, all Koncept lighting products use high quality LED light sources with CRI over 90 and L70 rated lifespan over 60,000 hours. Desktop and task personal lighting also provide the opportunity to reduce overhead lighting.

Photometrics: Light source placed 18" away from work surface. Graph represents 5,000 K light.

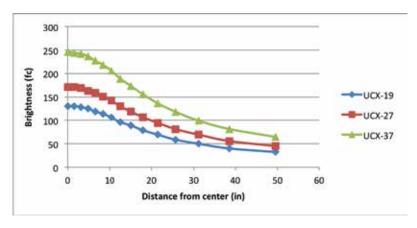

<sup>\*</sup>Measurements based on brightest setting at 5,000 K, 18" distance