

koncept



Z-Bar pendant *bird*

The renowned Z-Bar pendant bird is a unique, three-dimensional shape that invokes flight. Available in three standard finishes and four standard sizes, it brings an element of modernity to any interior.


Standard Configurations




bird with 16" light bars



bird with 24" light bars

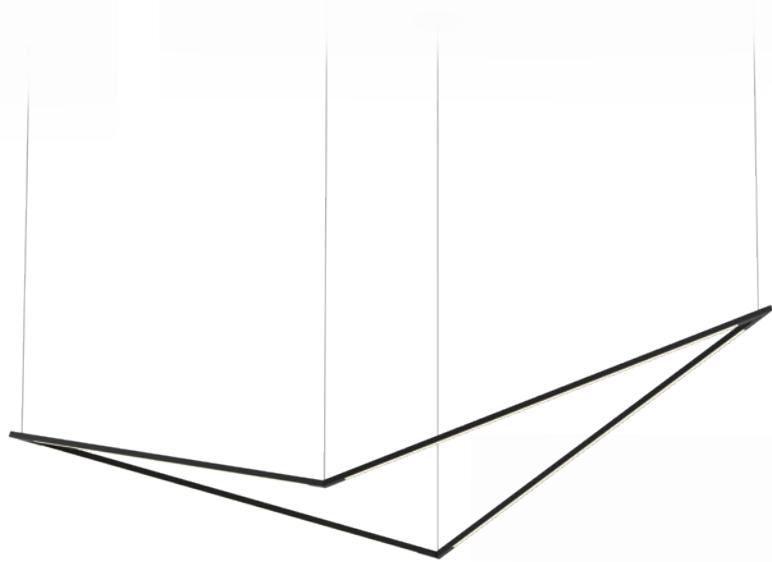

bird with 36" light bars

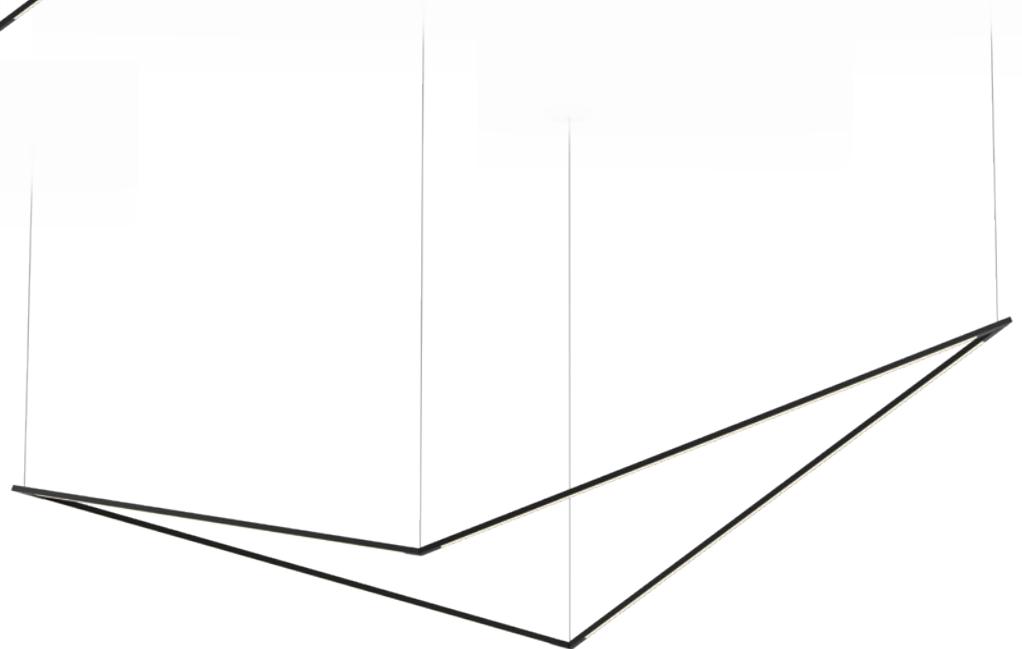

bird with 48" light bars

Standard Configurations



Z-Bar pendant bird at Midway Airport, Chicago

Standard Configurations

Lumens:	16-B: 1600 / 24-B: 2400 / 36-B: 2700 / 48-B: 5200
Energy Consumption:	16-B: 28 W / 24-B: 40 W / 36-B: 45 W / 48-B: 80 W
Rated Lifespan	>60,000 hours
Color Rendering Index (CRI) :	90
Brightness Adjustability:	For CNP Option : Compatible with ELV wall dimmers For RTM Option : 1 – 10V dimming control only
Material:	Aluminum, plastic
Cable length:	10'
Safety Rating:	C-UL-US Certified, CE
Warranty:	5 years; 1 year for hardwire driver
Voltage:	120 V (Custom 277V option available, ask for details)
Standard Finishes:	Matte black, matte white, silver


Visit koncept.com/dimmers for information on compatible dimmers.
Remote transformers are only compatible with 1-10V dimmers.

Power placement


There are two ways to mount the Z-Bar pendant bird using the canopy:
monopoint installation or multipoint installation. The same parts are used for each installation method.

Remote transformers are sold separately and are only available for multipoint installation.

Monopoint installation



Multipoint installation




Dimensions

16-B = 10.5"
24-B = 14.68"
36-B = 22"
48-B = 29.36"

16-B = 34"
24-B = 49"
36-B = 70.5"
48-B = 92"


16-B = 6.75"
24-B = 9.375"
36-B = 13.375"
48-B = 17.375"

Canopy



1.3"

Remote Transformer

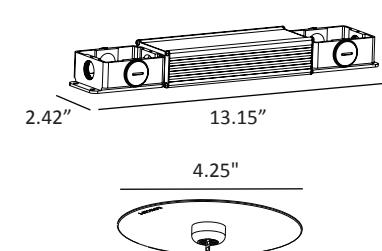

*Compatible with 16-B, 24-B, 36-B only

How to specify

1. Choose an option from each column and enter into the appropriate fields at the bottom.
2. Submit this "SKU" to sales@koncept.com, along with any questions.

Custom options	ZBP	Light Bar Length (in) (this is length of each light bar, NOT length of fixture.)	Model	Light Temperature (K)	Finish	Mount
Stock standard		16 24 36 48	B	1,800* 2,000* 2,200* 2,500* 2,700 3,000 (SW) 3,500 4,000 4,500 5,000 5,700 6,500 dummy bar (DB)	Silver (SIL) Matte black (MTB) Matte white (MWT) Gold (GLD)	Canopy (CNP) Remote Transformer (RTM)

Order example: **ZBP - 24 - B - 3500 - GLD - RTM**

Customization charges apply.

*CRI for custom color temperatures below 2700K is 80+

Additional lead time/charges may be applied to non-stocked options

LEED information

Integrative Process

To support high-performance, cost-effective project outcomes through an early analysis of the interrelationships among systems.

Koncept's LED lighting fixtures operate at high efficacy, therefore helping to minimize energy costs. All Koncept lighting fixtures are dimmable so that occupants can choose the appropriate setting to avoid energy overuse.

Interior Lighting

To promote occupants' productivity, comfort and well-being by providing high-quality lighting.

Koncept's entire line of hardwired lighting fixtures are dimmable. Users can adjust the brightness settings to suit their needs. Furthermore, all products utilize high quality LED light sources with CRI over 80 and L90 rated lifespan over 60,000 hours.