


koncept

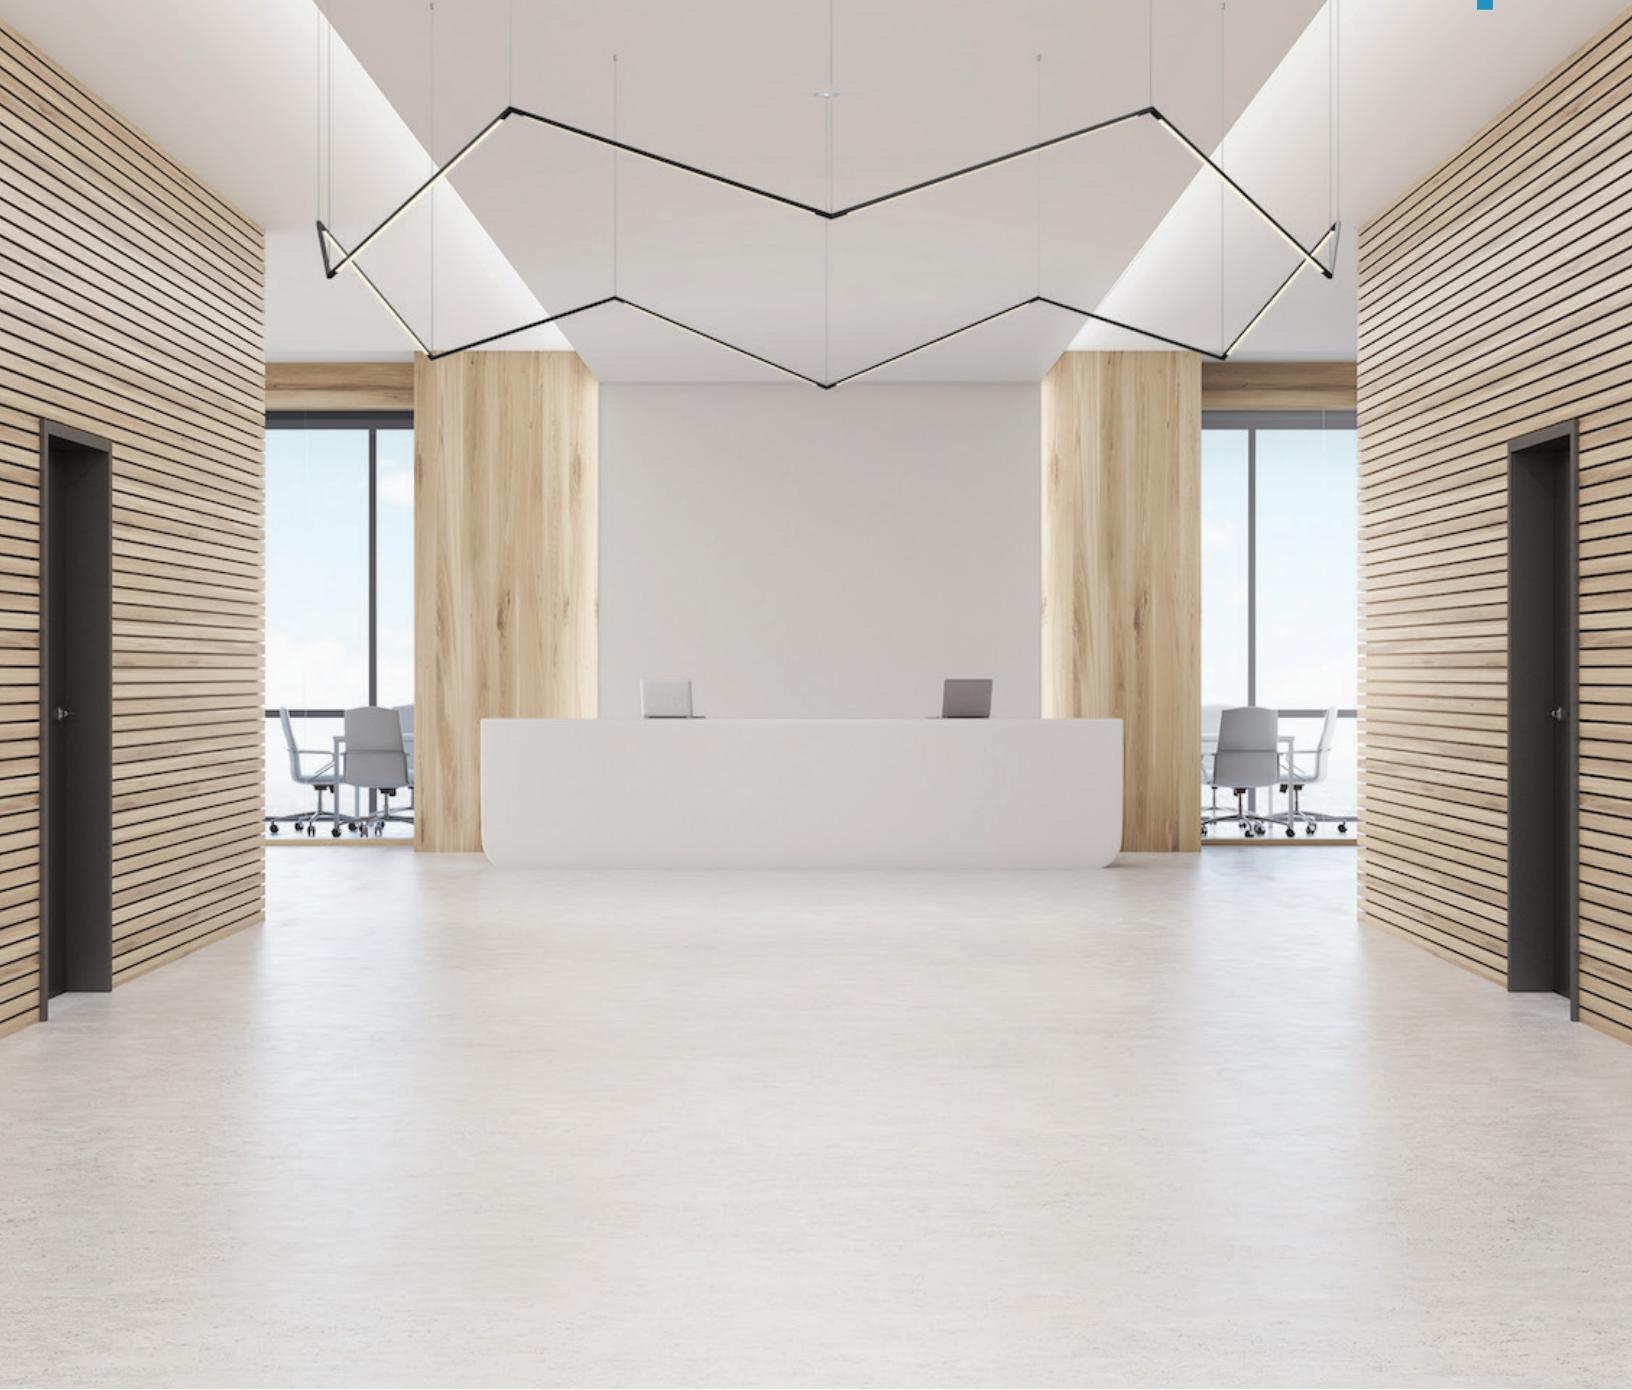


Z-Bar pendant crown

The Z-Bar pendant crown is a dramatic piece comprised of 12 LED light bars. Available in 3 standard finishes and 2 standard sizes, it's suitable for commercial and residential spaces alike.


Standard Configurations




crown with 16" light bars

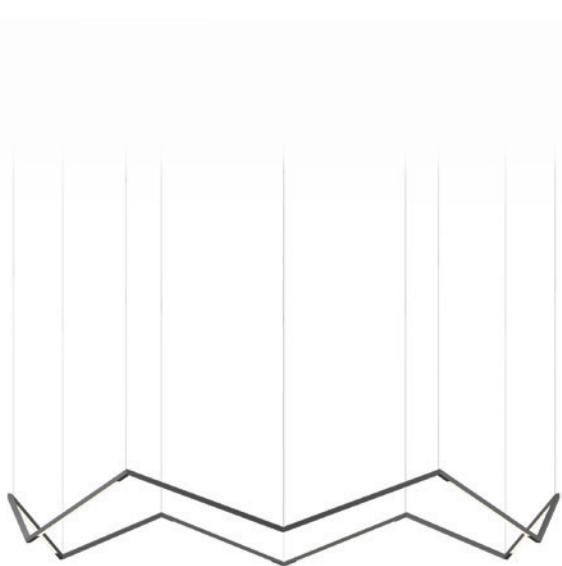

crown with 24" light bars

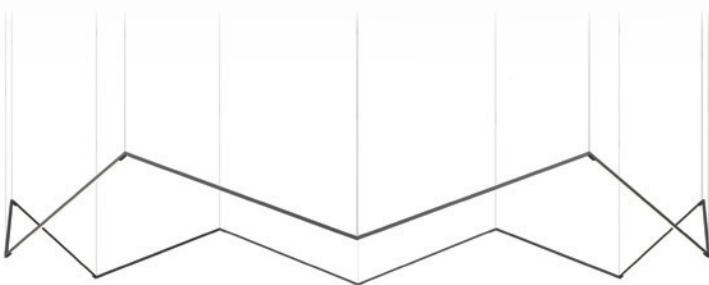

crown with 36" light bars

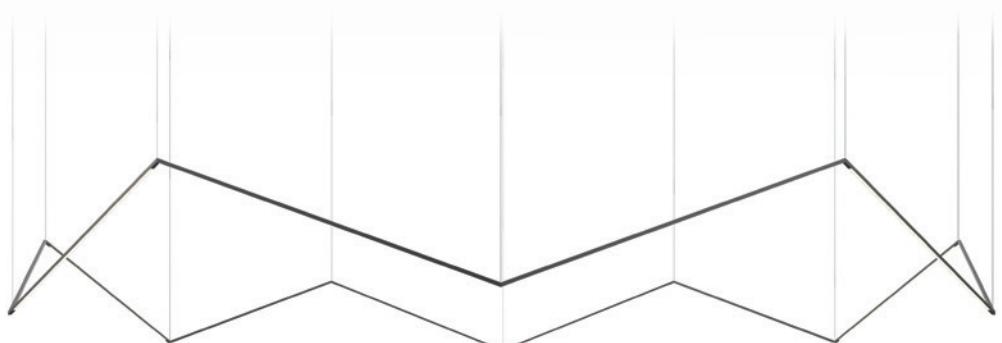

crown with 48" light bars

Standard Configurations

Lumens:	16-C: 4800 / 24-C: 7200 / 36-C: 10800 / 48-C: 14400
Energy Consumption:	16-C: 84 W / 24-C: 120 W / 36-C: 180 W / 48-C: 240 W
Rated Lifespan	>60,000 hours=
Color Rendering Index (CRI) :	90
Brightness Adjustability:	For CNP Option : Compatible with ELV wall dimmers For RTM Option : 1 – 10V dimming control only
Material:	Aluminum, plastic
Cable length:	10'
Safety Rating:	C-UL-US Certified, CE
Warranty:	5 years; 1 year for hardwire driver
Voltage:	277V (remote transformer)
Standard Finishes:	Matte black, matte white, silver



*Visit koncept.com/dimmers for information on compatible dimmers.
Remote transformers are only compatible with 1-10V dimmers.

Power placement

The Z-Bar pendant crown can only be mounted by multipoint installation.
Remote transformers are sold separately and are only available for multipoint installation.

Dimensions

16-C: **62.8"**
24-C: **91.41"**
36-C: **137.12"**
48-C: **182.82"**

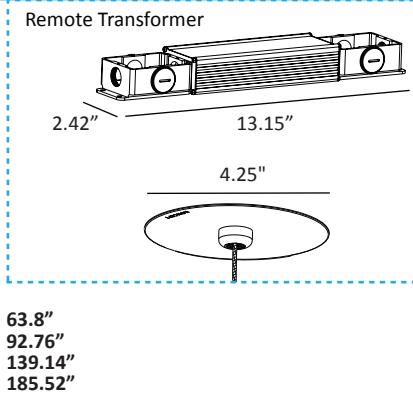

How to specify

1. Choose an option from each column and enter into the appropriate fields at the bottom.
2. Submit this "SKU" to sales@koncept.com, along with any questions.

Custom options
Stock standard

ZBP	Light Bar Length (in) (this is length of each light bar, NOT length of fixture.)	Model	Light Temperature (K)	Finish	Mount
	16	C	1,800* 2,000* 2,200* 2,500* 2,700 3,000 (SW) 3,500 4,000 4,500 5,000 5,700 6,500 dummy bar (DB)	Silver (SIL) Matte black (MTB) Matte white (MWT) Gold (GLD)	Remote Transformer (RTM)
	24				
	36				
	48				
					Remote Transformer is recommended for any configuration requiring more than 40 W energy consumption.

Order example: **ZBP - 24 - C - 3500 - GLD - RTM**

Customization charges apply.

*CRI for custom color temperatures below 2700K is 80+

Additional lead time/charges may be applied to non-stocked options

LEED information

Integrative Process

To support high-performance, cost-effective project outcomes through an early analysis of the interrelationships among systems.

Koncept's LED lighting fixtures operate at high efficacy, therefore helping to minimize energy costs. All Koncept lighting fixtures are dimmable so that occupants can choose the appropriate setting to avoid energy overuse.

Interior Lighting

To promote occupants' productivity, comfort and well-being by providing high-quality lighting.

Koncept's entire line of hardwired lighting fixtures are dimmable. Users can adjust the brightness settings to suit their needs. Furthermore, all products utilize high quality LED light sources with CRI over 80 and L90 rated lifespan over 60,000 hours.