

Z-BAR solo mini


Designer
Peter Ng

The Z-Bar Solo Mini may be the smallest in the Z-Bar line by size, but its features are as plentiful as the rest. Consider mounting the Z-Bar Solo Mini to the desk or wall to completely free up desk space. You may be short on space, but you don't have to sacrifice functionality or style.




Lumens:	320
Energy Consumption:	6.5 watts
Number of LEDs:	28 LEDs
LED Rated Lifespan:	50,000 hours
Color Temperature:	Daylight: 5,000 K / Warm: 3,500 K
Color Rendering Index (CRI):	85
Dimmer:	Built-in touchstrip
Brightness Adjustability:	Multiple dimming levels
Standard Color Finish:	Metallic Black, Silver
Material:	Aluminum/Plastic
Cord:	Black, 10'
C-UL-US Certified	
Maximum Brightness (38cm above desk):	1238 lx

AR1100-	-	-	-
CD	=	Cool White	
WD	=	Warm White Light	
MBK	=	Metallic Black	
SIL	=	Silver	
DSK	=	Desk Base	
CLP	=	Clamp (One-Piece)	
2CL	=	Two-Piece Clamp	
SLT	=	Slatwall Mount	
WAL	=	Wall Mount	
GRM	=	Grommet Mount	
THR	=	Through-Table Mount	

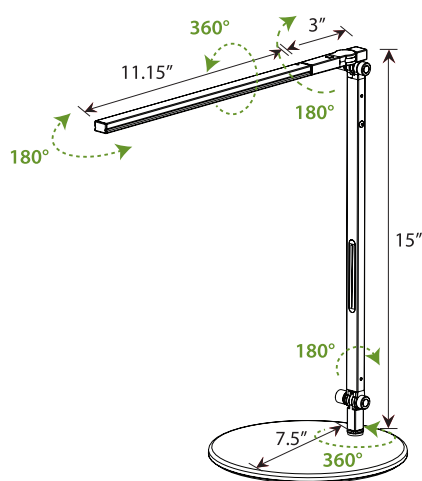

Mounting Options*

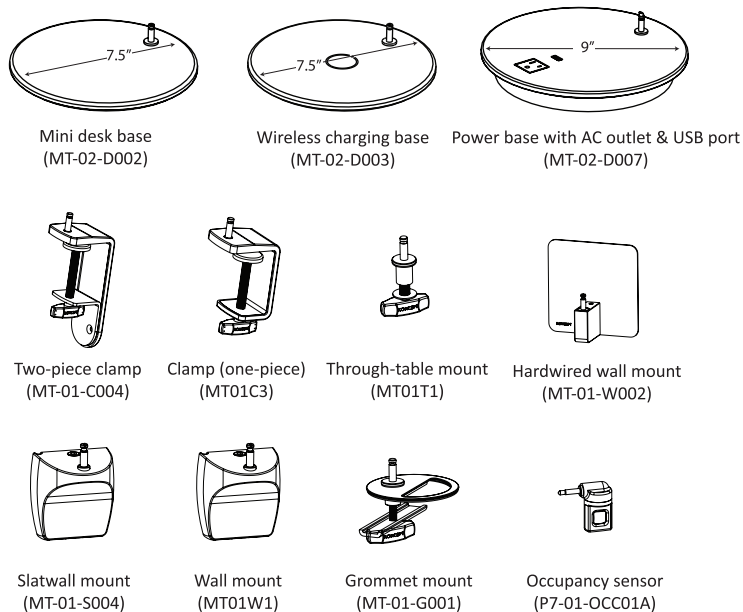

*Limited finishes available on mounting options

Potential LEED Points

Integrative Process (Possible 2 points)

To support high-performance, cost-effective project outcomes through an early analysis of the interrelationships among systems.


Koncept's LED desktop and task lighting provides finer control over lighting levels in occupied spaces. With personal lighting in place, elimination or downsizing of building lighting systems is possible.

Interior Lighting (Possible 2 points)

To promote occupants' productivity, comfort and well-being by providing high-quality lighting.

All Koncept's task lighting products provide more than three lighting levels that are easily adjustable by occupants to suit their needs. Furthermore, all Koncept's task lighting products use high quality LED light sources with CRI over 80 and L70 rated lifespan over 50,000 hours. Desktop and task personal lighting also provides the opportunity to reduce overhead lighting.

Light source placed at 15" away from worksurface

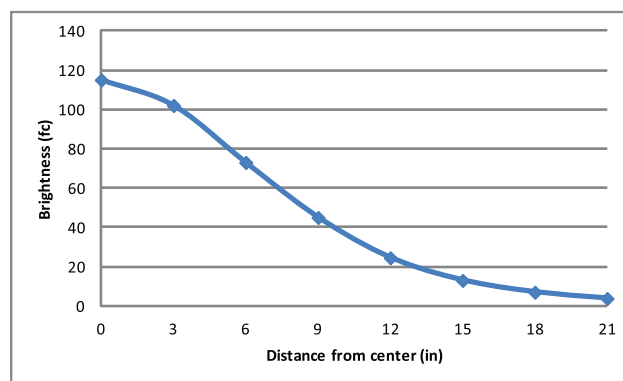

(Shown: photometrics of diffused light model)